
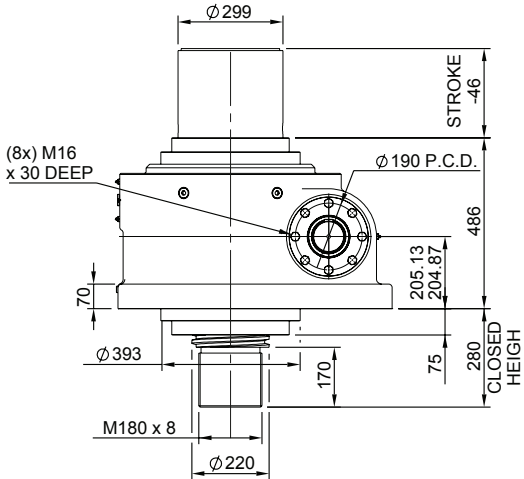
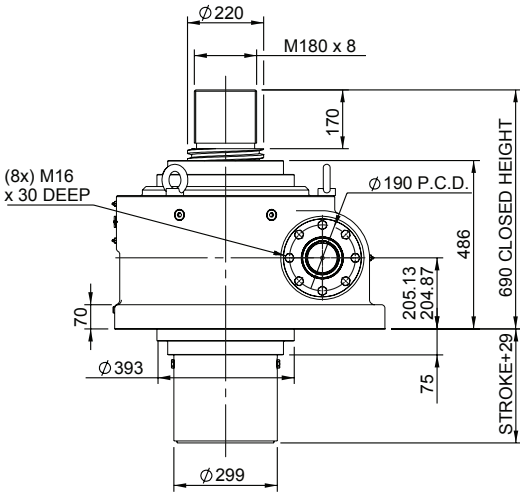
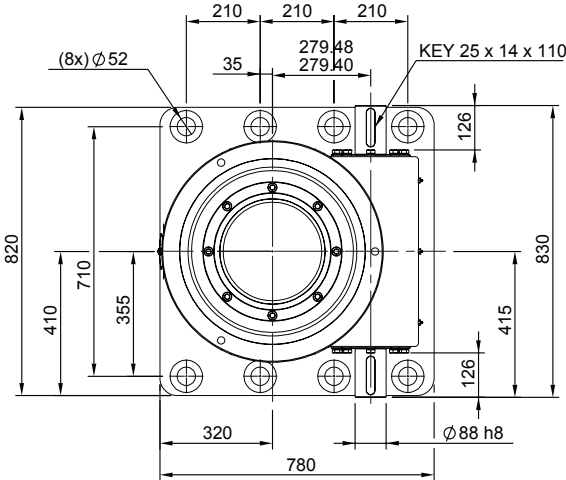


Upright EMT2000-U00

Inverted EMT2000-I00

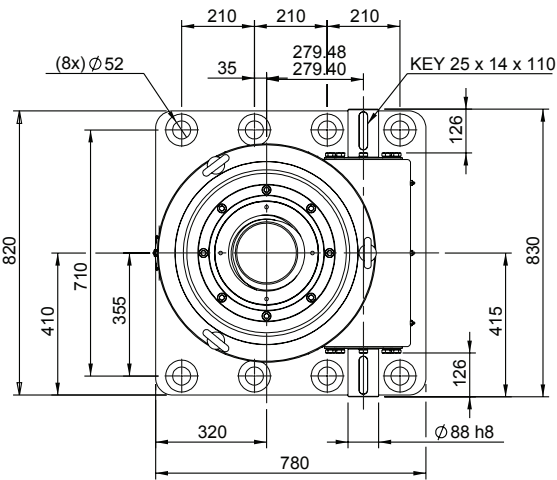

EMT2000-U00

Closed Height




Translating Screw


EMR2000-U00




Rotating Screw

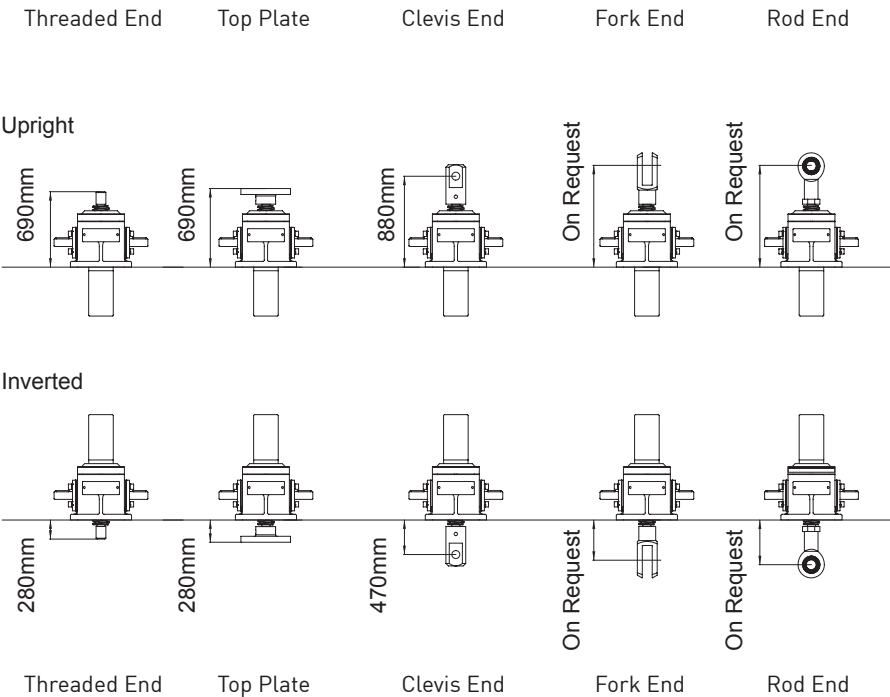

Upright EMR2000-U00

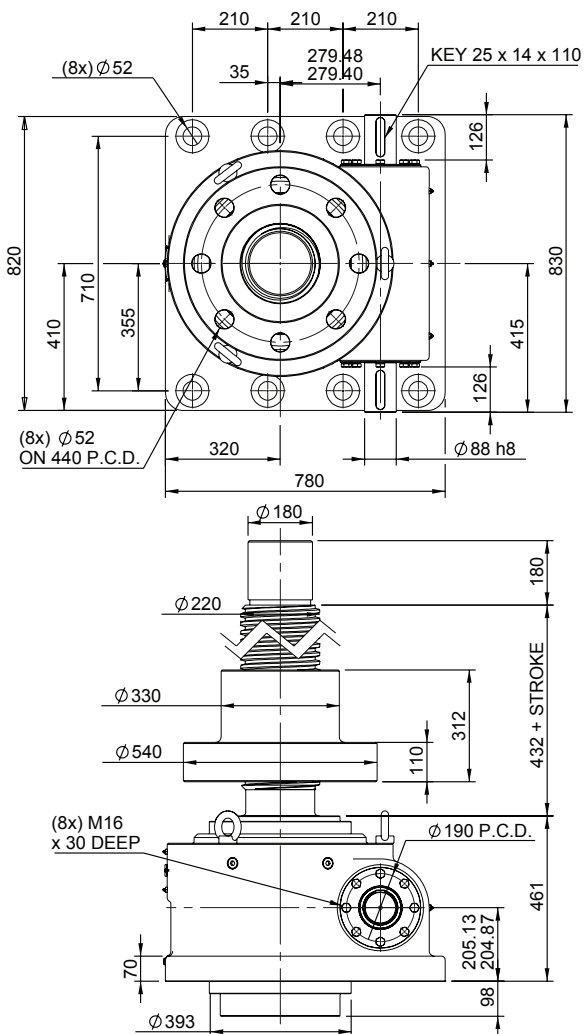



Inverted EMR2000-I00

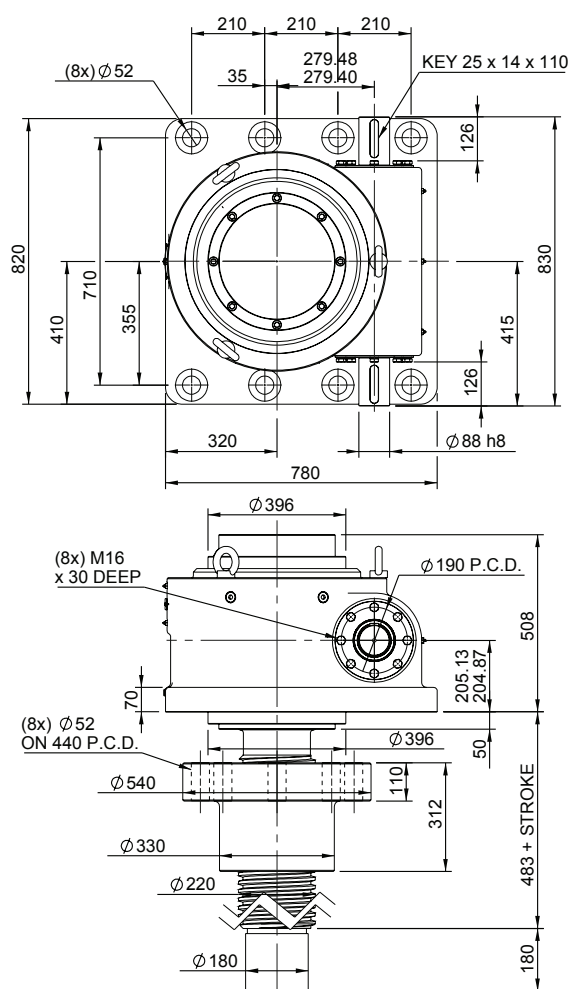

Performance

Model		EMT2000 EMR2000
Capacity	kN	2000
Lifting Screw	Diameter (mm)	220
	Lead	24
Gear Ratio Option 1	Gear Ratio	18:1
	Screw Jack Static Efficiency	0.109
	Screw Jack Static Dynamic	0.151
Gear Ratio Option 2	Gear Ratio	on request
	Screw Jack Static Efficiency	on request
	Screw Jack Static Dynamic	on request
Max. Input power (kW)	Gear Ratio Option 1	32.5
	Gear Ratio Option 2	on request
Start up torque at full load (Nm)	Gear Ratio Option 1	3895
	Gear Ratio Option 2	on request

Column Strength

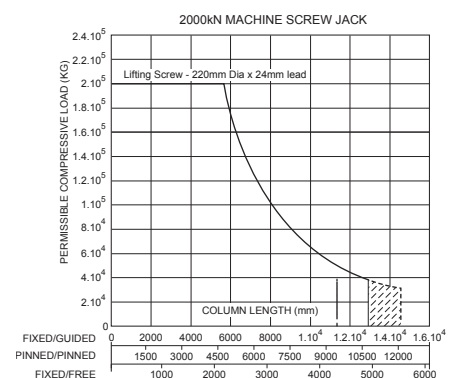

Critical Screw Speed

